




This power unit has a single acting circuit with two SAE#6 (9/16-18) ports for straight or 90° hose connection option. 2 position/2 way manual valve with internal check. This circuit design also utilise a cartridge check and adjustable relief valve. The gear pump is equipped with a suction screen inside the tank which comes with a 3/4" NPT breather/dipstick.


OPTIONS:

- ▶ **Motor:** AC 115/230V, single phase
AC 230/460/575V three phase
- ▶ **Tank:** From 1.7 liters to 23.5 liters. Plastic or Steel
- ▶ **Pump:** 0.8, 1.0, 1.3, 1.6, 2.1, 2.5, 3.2, 4.2, 5.8 and 8.0cc
- ▶ **Mounting:** Vertical

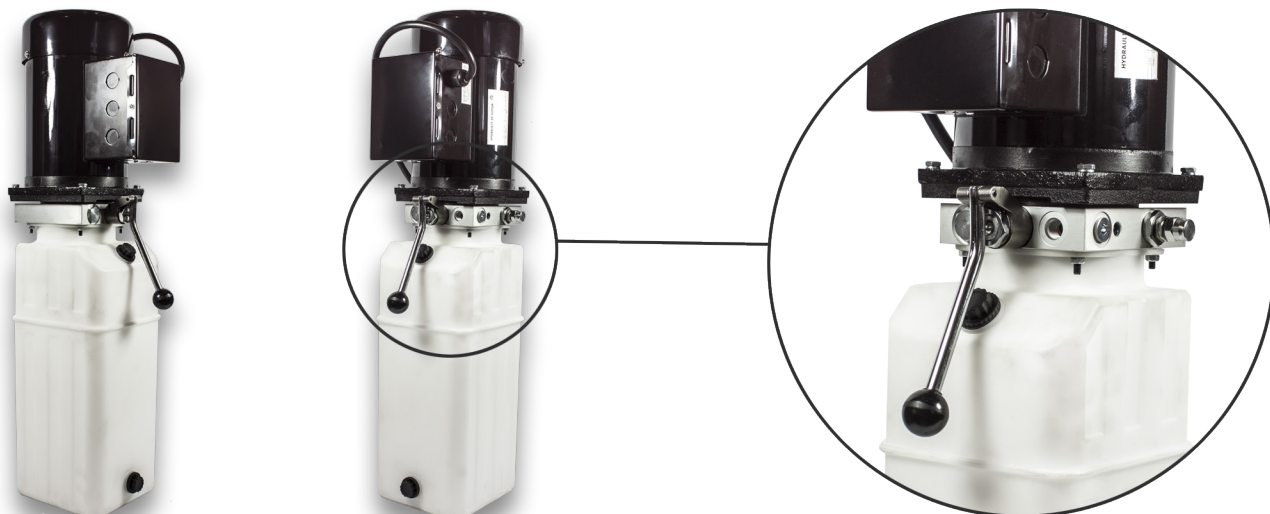


TYPICAL APPLICATION:

- ▶ **Pressure Up / Gravity Down System**
- ▶ **Single Acting Telescopic Cylinders**
- ▶ **Scissor Lift**
- ▶ **Carlift**

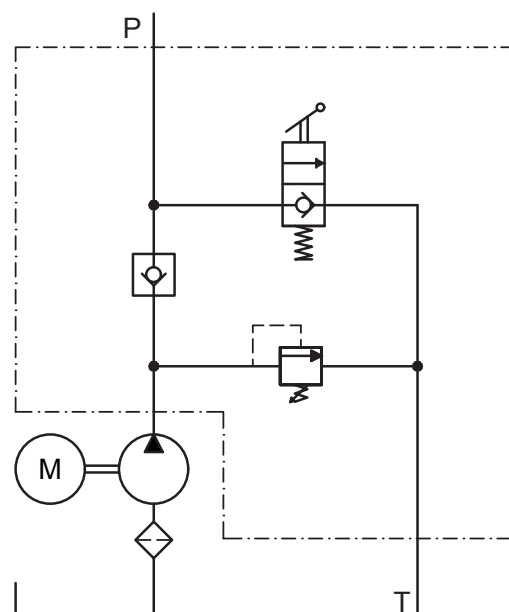

MODEL05

WWW.EAGLE-HYDRAULIC.COM

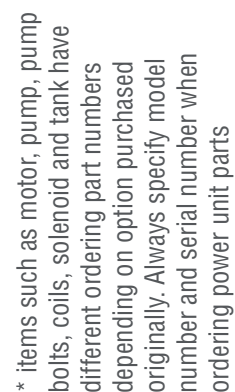

ITEM	PART NUMBER	DESCRIPTION	QTY
1	600xxx*	Motor*	2
2	300070	Motor Bolt	4
3	210020	Block	1
4	111000	Relief Valve	1
5	315000	Block Plug	1
6	115250	Manual Valve	1
7	110100	Checkvalve	1
8	421000	Pump/Motor Coupler	1